


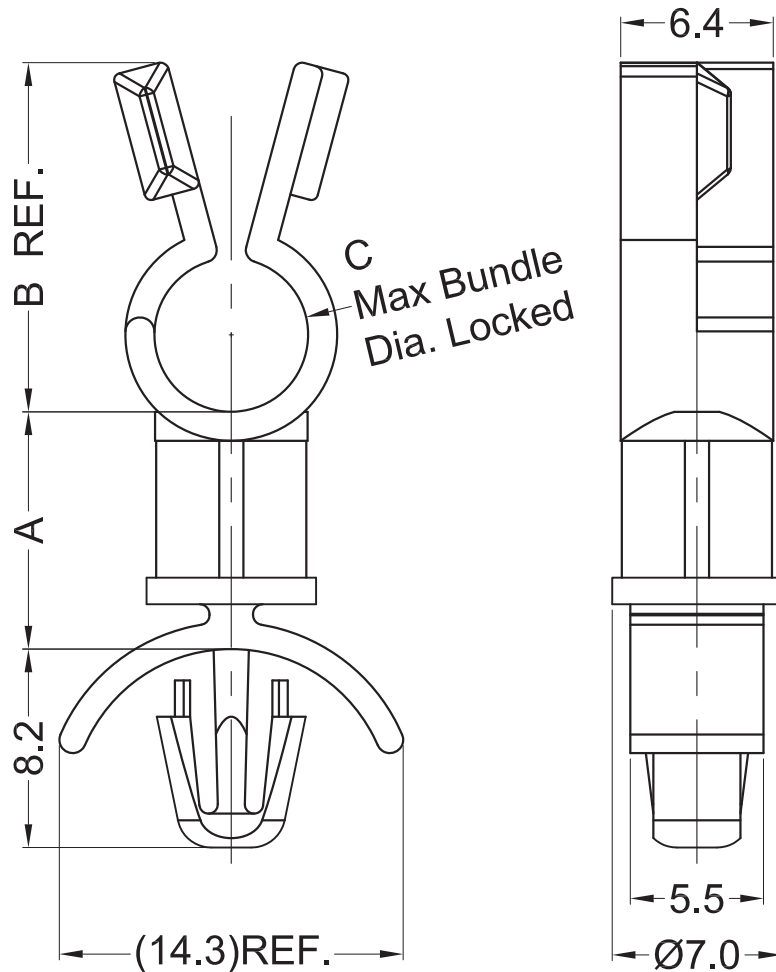

Notes:

1. Color: Natural;
2. RoHS Compliant;
3. Hole: $\text{Ø}4.75 \pm 0.08 \text{ mm}$;
Panel Thickness: 1.6mm.

PartNo.	Part Name	PartNo.	Part Name	A	B	C Max Bundle Dia. Locked
60657	GSLCS-250-4M-66	60658	GSLCS-250-4M-V0	4.0	13.5	4.8
60407	GSLCS-250-3-66	60642	GSLCS-250-3-V0	4.8		
60408	GSLCS-250-4-66	60643	GSLCS-250-4-V0	6.4		
60409	GSLCS-250-6-66	60644	GSLCS-250-6-V0	9.5		
60410	GSLCS-250-8-66	60645	GSLCS-250-8-V0	12.7		
60411	GSLCS-250-10-66	60646	GSLCS-250-10-V0	15.9		
60412	GSLCS-250-16-66	60647	GSLCS-250-16-V0	25.4		
60767	GSLCS-500-3-66	60760	GSLCS-500-3-V0	4.8	20.1	11.1
60768	GSLCS-500-4-66	60761	GSLCS-500-4-V0	6.4		
60769	GSLCS-500-6-66	60762	GSLCS-500-6-V0	9.5		
60770	GSLCS-500-8-66	60763	GSLCS-500-8-V0	12.7		
60771	GSLCS-500-10-66	60764	GSLCS-500-10-V0	15.9		
60772	GSLCS-500-16-66	60765	GSLCS-500-16-V0	25.4		
Material: PA66 UL94V2		Material: PA66 UL94V0				

Americom GmbH
<https://americom.de>

americom
 Komponenten die verbinden

DATE	2014-8-20	DIMENSION	L ≤ 4	TOLERANCE	±0.10
SCALE	FIT				
PART NAME	GSLCS	MOLD NO.	S0250/S0800	DRAW	ZHR
UNIT	MM	4 < L ≤ 15		±0.20	
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	ZHR
VERSION	A0	15 < L ≤ 50		±0.30	
DWG NO.	E6145	COLOR	SEE NOTES	APPROVAL	FDL
VIEW		50 < L ≤ 100		±0.40	