


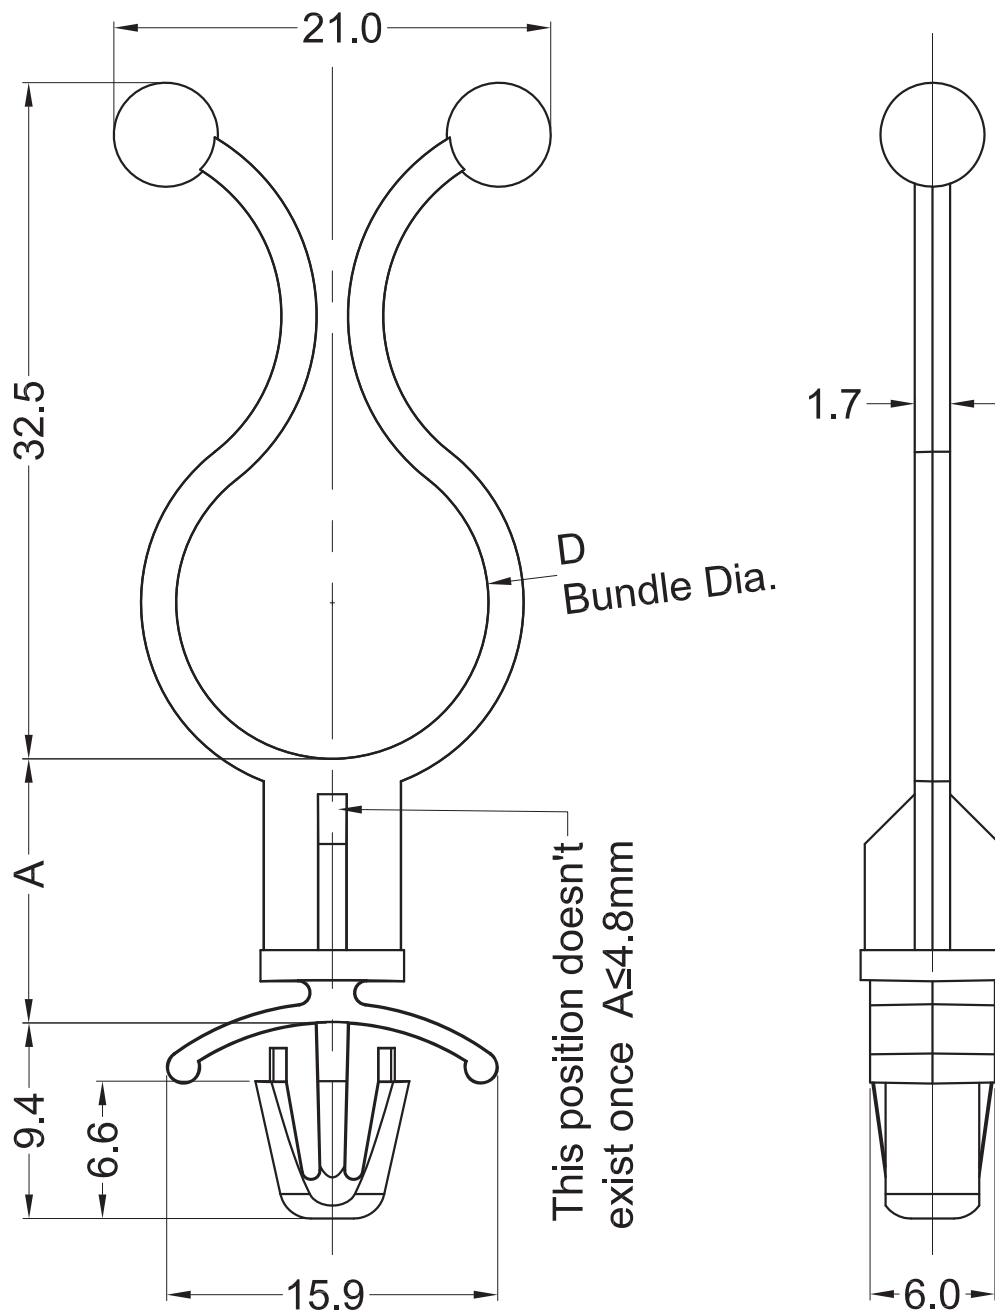

Notes:

1. Color: Natural;
2. RoHS Compliant;
3. Hole: $\varnothing 6.0 \pm 0.08 \text{mm}$;
Panel Thickness: 0.8-2.0mm.

Part No.	Article No.	Part No.	Article No.	A	D Bundle Dia.
60823	GSOTL4-60-4M-66	60824	GSOTL4-60-4M-V0	4.0	12.7-15.2
60300	GSOTL4-60-1-66	60543	GSOTL4-60-1-V0	4.8	
60301	GSOTL4-60-2-66	60544	GSOTL4-60-2-V0	12.7	
60302	GSOTL4-60-3-66	60545	GSOTL4-60-3-V0	19.1	
60303	GSOTL4-60-4-66	60546	GSOTL4-60-4-V0	25.4	
60304	GSOTL4-60-5-66	60547	GSOTL4-60-5-V0	31.8	
Material: PA66 UL94V2		Material: PA66 UL94V0			

Americom GmbH
<https://americom.de>

americom
Komponenten die verbinden

DATE	2022-6-15	DIMENSION	L ≤ 4	TOLERANCE	±0.10
SCALE	FIT				
UNIT	MM		4 < L ≤ 15		±0.20
VERSION	A0		15 < L ≤ 50		±0.30
VIEW			50 < L ≤ 100		±0.40

TITLE	STAND-OFF TWIST LOCK				
ARTICLE NO.	GSOTL4-60	MOLD NO.	S0578	DRAW	JF
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF
DWG NO.	E6110	COLOR	SEE NOTES	APPROVAL	FDL