


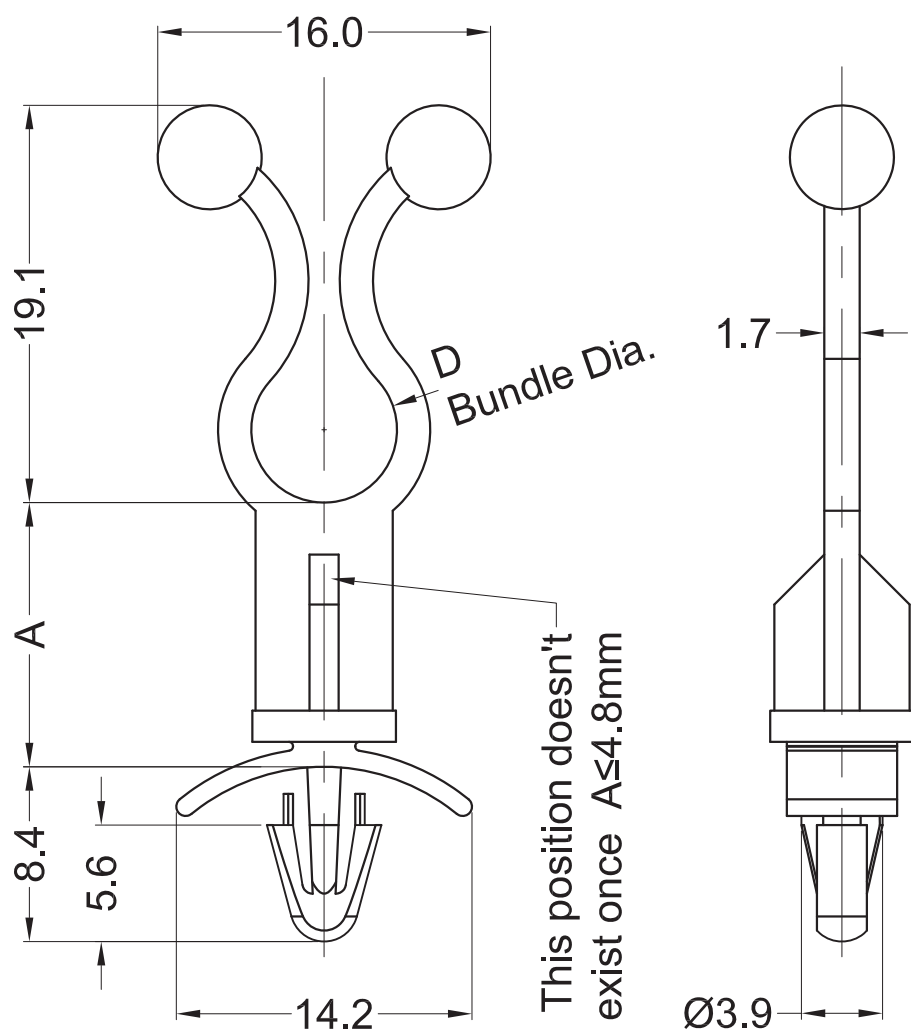

Notes:

1. Color: Natural;
2. RoHS Compliant;
3. Hole: $\varnothing 4.0 \pm 0.08 \text{mm}$;
Panel Thickness: 0.8-2.0mm.

Part No.	Article No.	Part No.	Article No.	A	D Bundle Dia.
60811	GSOTL2-25-4M-66	60812	GSOTL2-25-4M-V0	4.0	5.1-7.6
60260	GSOTL2-25-1-66	60528	GSOTL2-25-1-V0	4.8	
60261	GSOTL2-25-2-66	60529	GSOTL2-25-2-V0	12.7	
60262	GSOTL2-25-3-66	60530	GSOTL2-25-3-V0	19.1	
60263	GSOTL2-25-4-66	60531	GSOTL2-25-4-V0	25.4	
60264	GSOTL2-25-5-66	60532	GSOTL2-25-5-V0	31.8	
Material: PA66 UL94V2		Material: PA66 UL94V0			

Americom GmbH
<https://americom.de>

americom
Komponenten die verbinden

DATE 2022-6-15
DIMENSION TOLERANCE

TITLE	STAND-OFF TWIST LOCK					SCALE	FIT	$L \leq 4$	± 0.10
ARTICLE NO.	GSOTL2-25	MOLD NO.	S0393	DRAW	JF	UNIT	MM	$4 < L \leq 15$	± 0.20
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF	VERSION	A0	$15 < L \leq 50$	± 0.30
DWG NO.	E6102	COLOR	SEE NOTES	APPROVAL	FDL	VIEW		$50 < L \leq 100$	± 0.40