


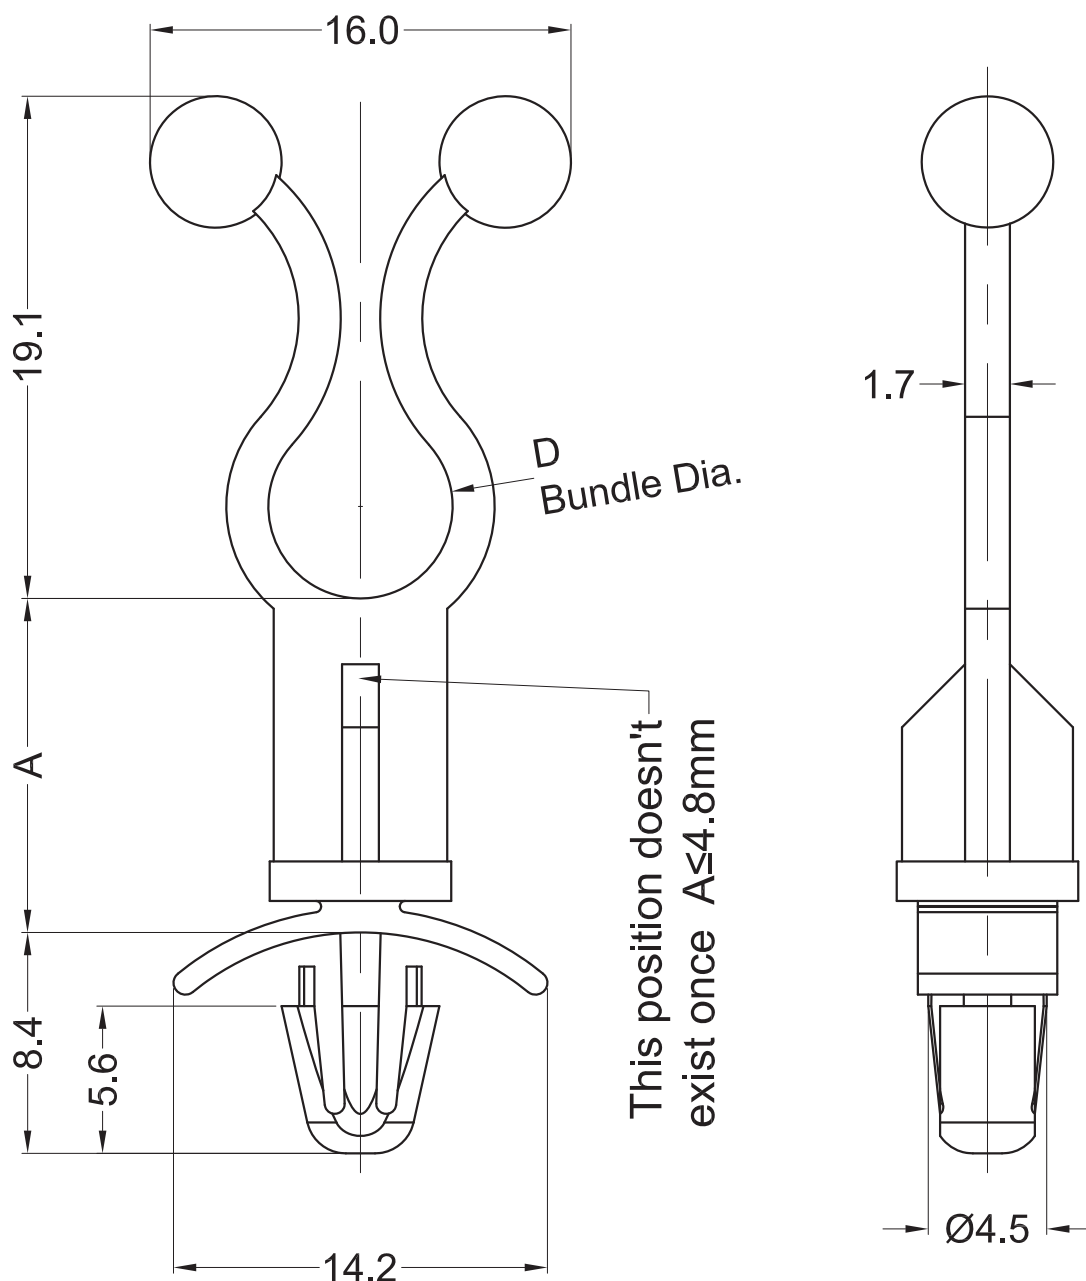

Notes:

1. Color: Natural;
2. RoHS Compliant;
3. Hole: $\text{Ø}4.75 \pm 0.08\text{mm}$;
Panel Thickness: 0.8-2.0mm.

Part No.	Article No.	Part No.	Article No.	A	D Bundle Dia.
60676	GSOTL-25-4M-66	60677	GSOTL-25-4M-V0	4.0	5.1-7.6
60152	GSOTL-25-1-66	60498	GSOTL-25-1-V0	4.8	
60153	GSOTL-25-2-66	60499	GSOTL-25-2-V0	12.7	
60154	GSOTL-25-3-66	60500	GSOTL-25-3-V0	19.1	
60155	GSOTL-25-4-66	60501	GSOTL-25-4-V0	25.4	
60156	GSOTL-25-5-66	60502	GSOTL-25-5-V0	31.8	
Material: PA66 UL94V2		Material: PA66 UL94V0			

Americom GmbH
<https://americom.de>

americom
Komponenten die verbinden

DATE	2022-6-15	DIMENSION	L ≤ 4	TOLERANCE	±0.10
SCALE	FIT				
UNIT	MM		4 < L ≤ 15		±0.20
VERSION	A0		15 < L ≤ 50		±0.30
VIEW			50 < L ≤ 100		±0.40

TITLE	STAND-OFF TWIST LOCK				
ARTICLE NO.	GSOTL-25	MOLD NO.	S0393	DRAW	JF
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF
DWG NO.	E6053	COLOR	SEE NOTES	APPROVAL	FDL