


GSLG-L

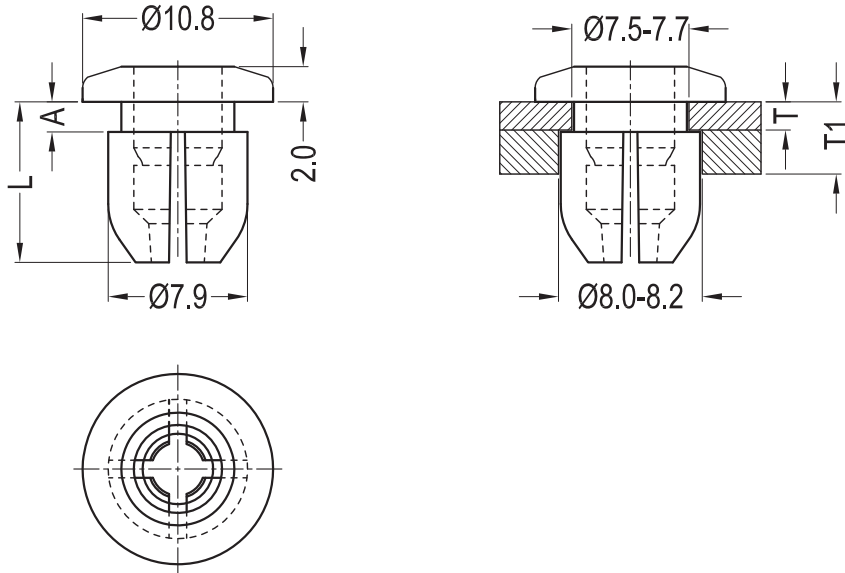

GSLPL-L

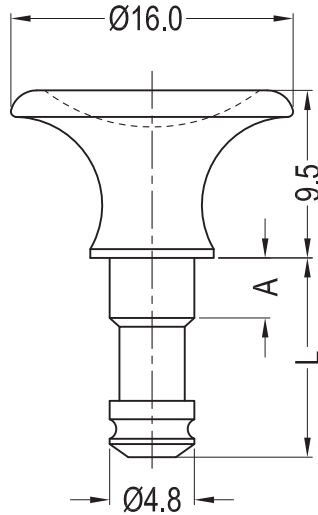


Fig.1

GSLPB-L

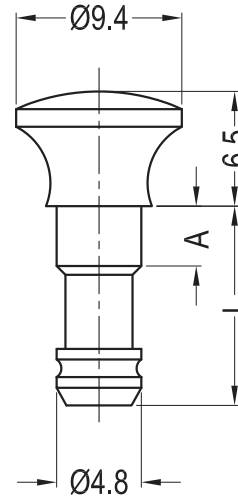


Fig.2

Notes:
1.Material:
PC UL94 V2(Grommet);
PA6 UL94 V2(Mating Plunger);
2.RoHS Compliant;

Style(Black/White)		A	L	T	T1	Style(Black/White)		Style(Black/White)		A	L
Grommet:GSLG						Mating Plunger:GSLPL (Fig.1)		Alternate Mating Plunger:GSLPB(Fig.2)			
SLB/SLW	20496/20497	1.2	8.6	1.1	1.5-3.7	SLB/SLW	20540/20541	SLB/SLW	20514/20515	2.8	10.7
1LB/1LW	20498/20499	1.7	9.0	1.6	2.0-4.2	1LB/1LW	20536/20537	1LB/1LW	20516/20517	3.4	11.3
2LB/2LW	20501/20502	2.7	10.0	2.5	3.0-5.2	2LB/2LW	20542/20543	2LB/2LW	20519/20520	4.4	12.3
3LB/3LW	20504/20505	4.3	11.7	4.1	4.6-6.9	3LB/3LW	20545/20546	3LB/3LW	20522/20523	6.0	13.9
4LB/4LW	20506/20507	5.5	12.9	5.3	5.8-8.0	4LB/4LW	20547/20548	4LB/4LW	20524/20525	7.2	15.1

Americom GmbH
<https://americom.de>

americom
Komponenten die verbinden

DATE	2019-4-12	DIMENSION	L ≤ 4	TOLERANCE	±0.10
SCALE	FIT	L ≤ 4	±0.20	4 < L ≤ 15	±0.30
UNIT	MM	15 < L ≤ 50	±0.40	50 < L ≤ 100	±0.40
VERSION	A0	VIEW			

TITLE	SNAP LATCH				
PART NAME	GSLG&GSLPL&GSLPB	MOLD NO.	/	DRAW	PLK
PART NO.	SEE TABLE	MATERIAL	SEE NOTES	DESIGN	PLK
DWG NO.	E2100	COLOR	SEE TABLE	APPROVAL	FDL