
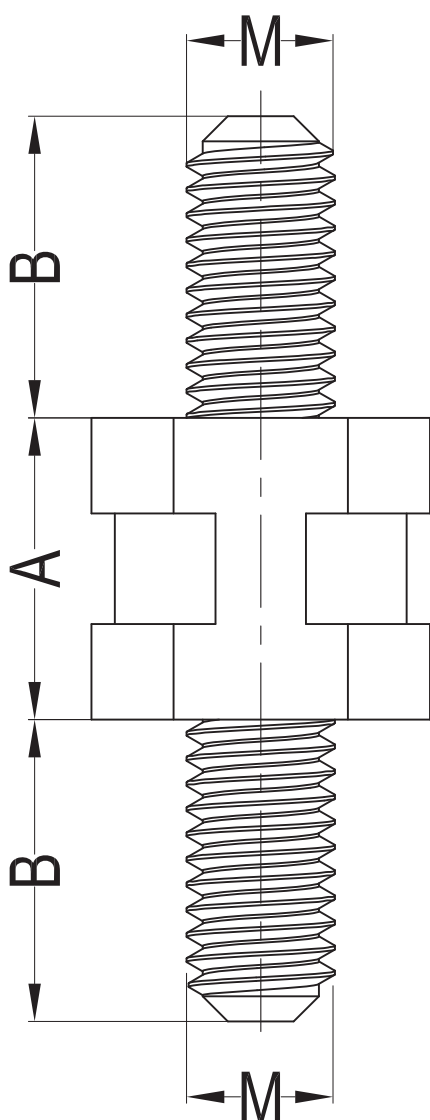


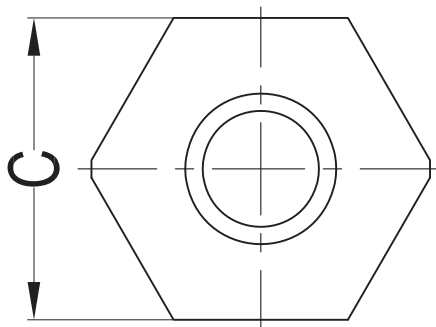

Notes:


1. Color: Black;
2. Male(M3) Torques: $\cong 0.13 \text{ N}\cdot\text{m}$;
3. Male(M4) Torques: $\cong 0.3 \text{ N}\cdot\text{m}$;
3. Male(M5) Torques: $\cong 0.58 \text{ N}\cdot\text{m}$;
4. RoHS Compliant.

Part No.	Article No.	Material	M Thread	A	B	C
42436	GHTS-MM-M3-6-5B-HB	PA66 UL94 HB	M3	5.0	6.0	6.0
42359	GHTS-MM-M3-6-6B-HB			6.0		
42552	GHTS-MM-M3-6-5B	PA66 UL94 V2		5.0		
42553	GHTS-MM-M3-6-6B			6.0		
41295	GHTS-MM-M3-6-25B			25.0		
42924	GHTS-MM-M3-6-35B			35.0		
42925	GHTS-MM-M4-6-12B		M4	12.0		
42926	GHTS-MM-M4-6-25B			25.0		
42927	GHTS-MM-M4-6-40B			40.0		
43582	GHTS-MM-M5-10-80B			M5	80.0	10.0

Americom GmbH
<https://americom.de>

americom
 Komponenten die verbinden

DATE 2021-11-18 DIMENSION TOLERANCE

TITLE	HEX SPACER					SCALE	FIT	L $\leq$ 4	± 0.10
ARTICLE NO.	GHTS-MM	MOLD NO.	S0417	DRAW	JF	UNIT	MM	4 < L $\leq$ 15	± 0.20
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF	VERSION	A0	15 < L $\leq$ 50	± 0.30
DWG NO.	E4078	COLOR	SEE NOTES	APPROVAL	FDL	VIEW		50 < L $\leq$ 100	± 0.40