


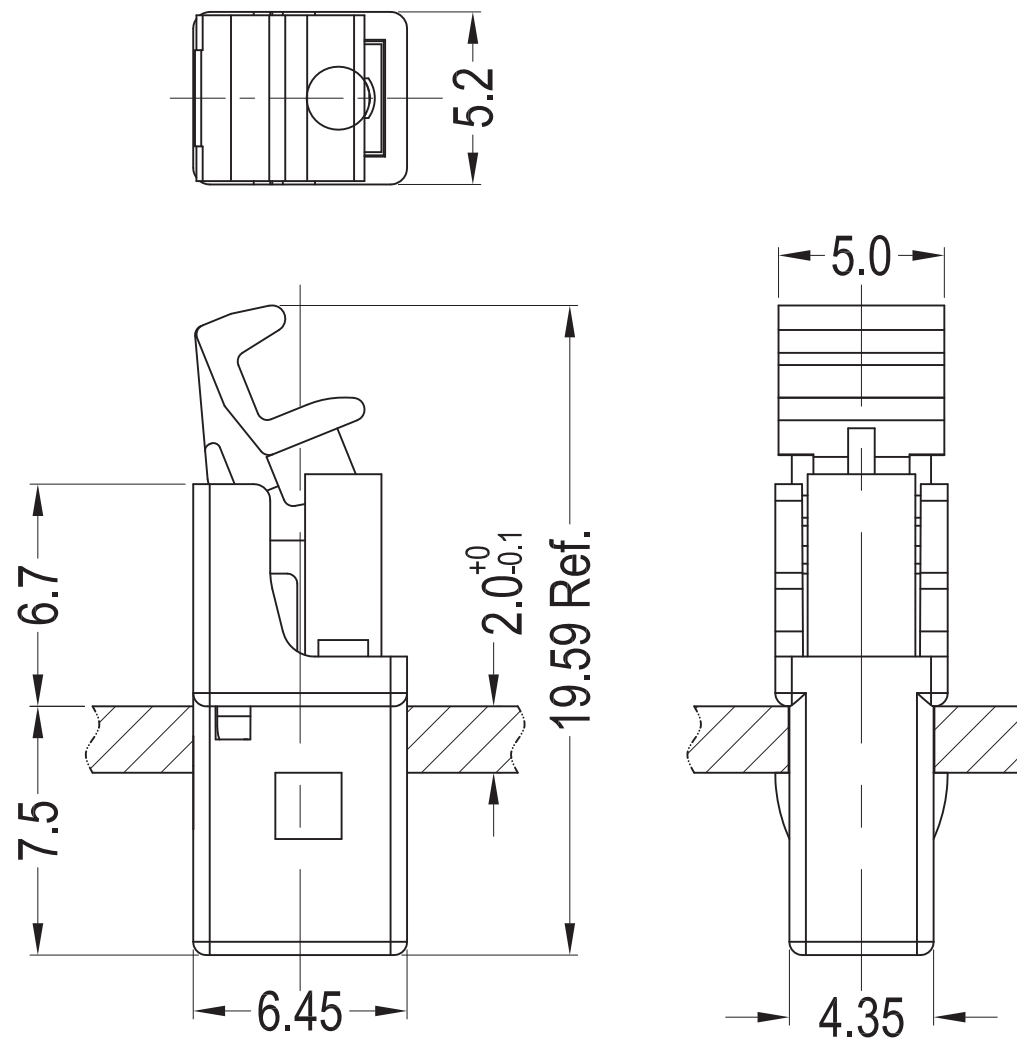

Notes:

- 1.Material:POM UL94 HB (Case);
PA66 UL94 V2 (Catcher);
Stainless Steel (Spring);
- 2.Continuous Working Temperature:
-10°C to 70°C;
- 3.Storage Temperature:-40°C to 80°C;
- 4.Hole: $4.4^{+0.1}_{-0} \times 6.5^{+0.1}_{-0}$;
Panel Thickness: $2.0^{+0}_{-0.1}$;
- 5.Life Cycles:30000 operations;
- 6.RoHS Compliant;

Americom GmbH https://americom.de						americom Komponenten die verbinden	DATE	2020-6-11	DIMENSION	TOLERANCE
TITLE	DOOR LATCH						SCALE	FIT	$L \leq 4$	± 0.10
PART NAME	DL-5	MOLD NO.	S0863	DRAW	JF		UNIT	MM	$4 < L \leq 15$	± 0.20
PART NO.	30182	MATERIAL	SEE NOTES	DESIGN	JF		VERSION	A0	$15 < L \leq 50$	± 0.30
DWG NO.	E3086	COLOR	Black	APPROVAL	FDL		VIEW		$50 < L \leq 100$	± 0.40