


Notes:

- 1.Material:POM UL94 HB (Case);
PA66 UL94 V2 (Catcher);
PC+GF (Arm);
304 Stainless Steel (Spring);
- 2.Continuous Working Temperature:
-10°C to 70°C;
- 3.Storage Temperature:-40°C to 80°C;
- 4.Hole: $\square 7.0^{+0.2}_{-0} \times \square 8.0^{+0.2}_{-0}$;
Panel Thickness: $2.0^{+0}_{-0.1}$;
- 5.Life Cycles:30000 operations;
- 6.RoHS Compliant;

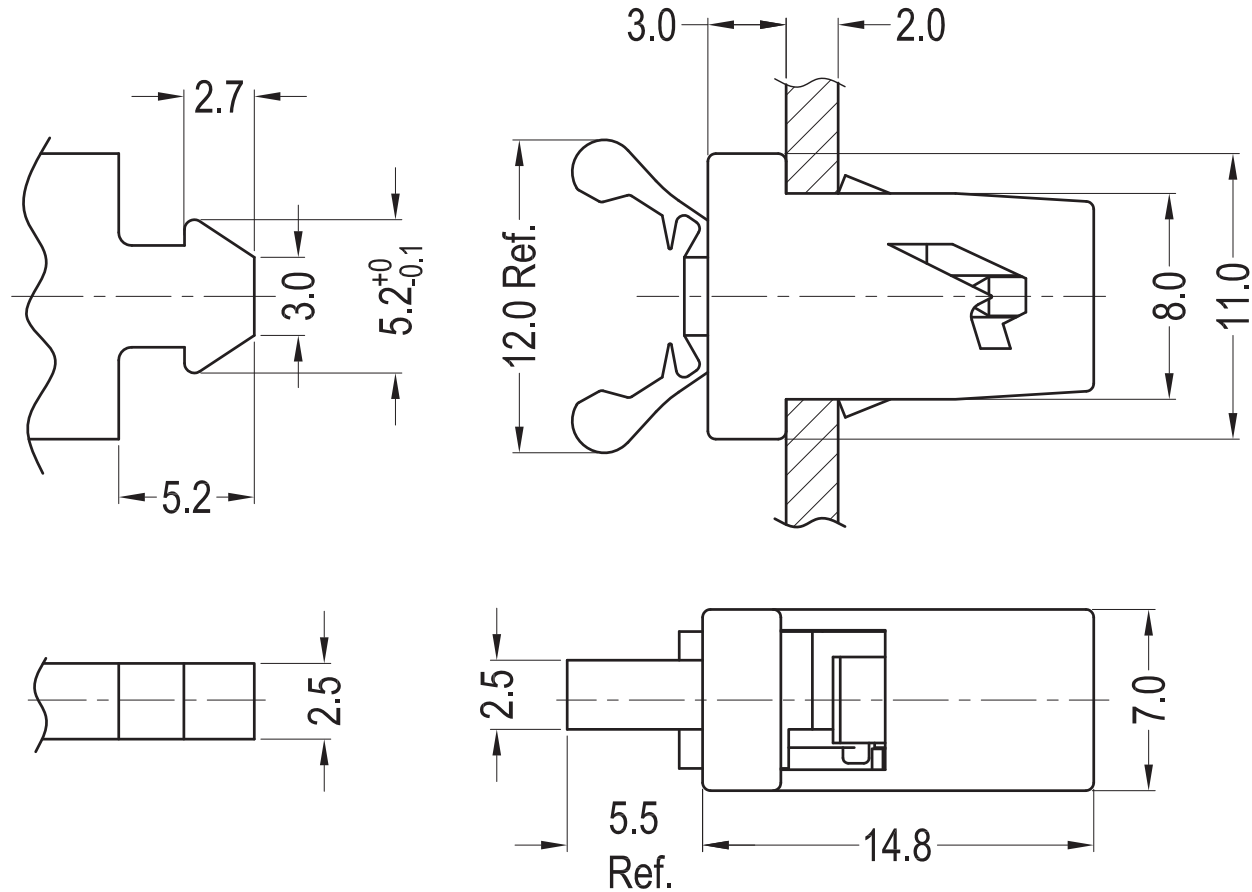

Body Locking Force:10N Max.

Body Release Force:50N Min.

Locking Stroke Force:5±2N

Retention Force(Locked):15N Min.

Locking Stroke:5.5mm

Release Stroke:1.3mm

Part No.	Part Name	Color
30178	DL-4-B	Black
30304	DL-4-G	Grey
30180	DL-4-W	White

Americom GmbH https://americom.de						DATE	2020-6-11	DIMENSION	TOLERANCE
TITLE	DOOR LATCH					SCALE	FIT	L ≤ 4	±0.10
PART NAME	DL-4	MOLD NO.	/	DRAW	JF	UNIT	MM	4 < L ≤ 15	±0.20
PART NO.	SEE TABLE	MATERIAL	SEE NOTES	DESIGN	JF	VERSION	A0	15 < L ≤ 50	±0.30
DWG NO.	E3078	COLOR	SEE TABLE	APPROVAL	FDL	VIEW		50 < L ≤ 100	±0.40