


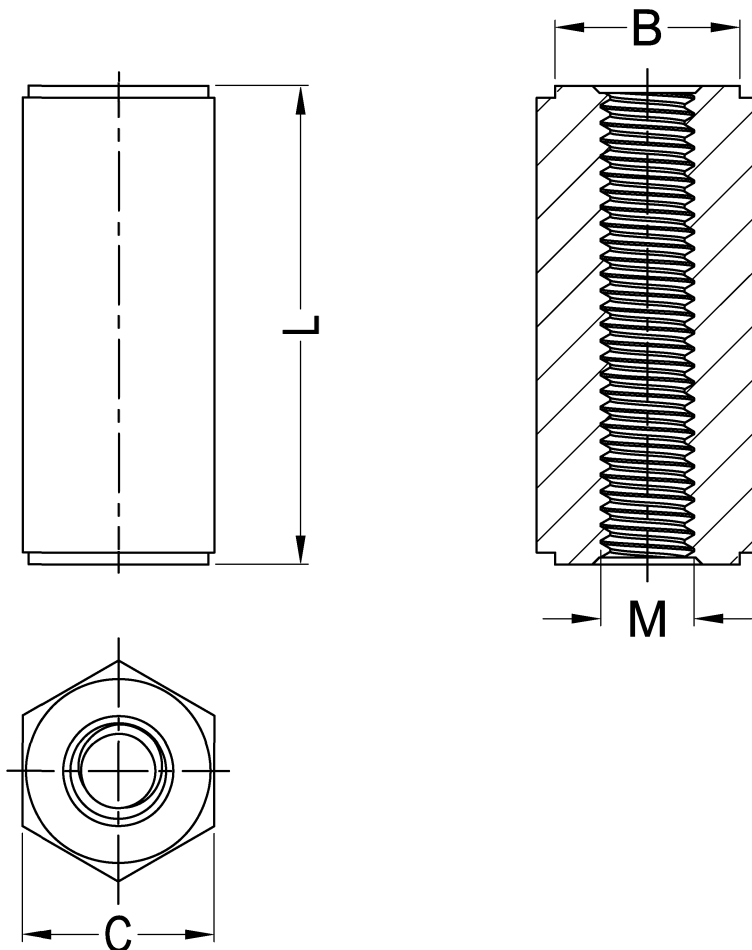

Notes:

1. Female Torques: $\geq 0.07 \text{ N}\cdot\text{m}$;
2. RoHS Compliant.

Part No.	Article No.	Material	Color	B	C	L	M
40961	GHTS-FF-M2-5-5B	PA6+GF UL94 HB	Black	4.85	5.0	5.0	M2
43121	GHTS-FF-M2-5-8B					8.0	
40962	GHTS-FF-M2-5-10B					10.0	
43320	GHTS-FF-M2-5-12B					12.0	
40963	GHTS-FF-M2-5-13B					13.0	
43122	GHTS-FF-M2-5-15B					15.0	
42473	GHTS-FF-M2-5-10N		Natural			10.0	
43123	GHTS-FF-M2-5-8BR	PA66+GF UL94 V0	Brown			8.0	
43124	GHTS-FF-M2-5-12BR					12.0	
43125	GHTS-FF-M2-5-15BR					15.0	

<https://americom.de>

americom
Komponenten die verbinden

DATE

2020-5-29

DIMENSION

TOLERANCE

TITLE

HEXAGONAL FEMALE/FEMALE SPACER

SCALE

FIT

$L \leq 4$

± 0.10

ARTICLE NO.

GHTS-FF-M2

MOLD NO.

S0461

DRAW

JF

UNIT

MM

$4 < L \leq 15$

± 0.20

PART NO.

SEE TABLE

MATERIAL

SEE TABLE

DESIGN

JF

VERSION

A0

$15 < L \leq 50$

± 0.30

DWG NO.

E4087


COLOR

SEE TABLE

APPROVAL

FDL

VIEW



$50 < L \leq 100$

± 0.40