


G1 (Thread)	L2
M2.5	6
M3	6
M4	8
M5	8
M6	10
M8	14

Type	Hexagonal
Styles	External/External With Undercut (optional without undercut)
Material	Stainless Steel 1.4305
Standard Pack	From 100 pcs
Length Tolerance	± 0.1 mm
Minimum Tensile Strength	750 N/mm <sup>2</sup>

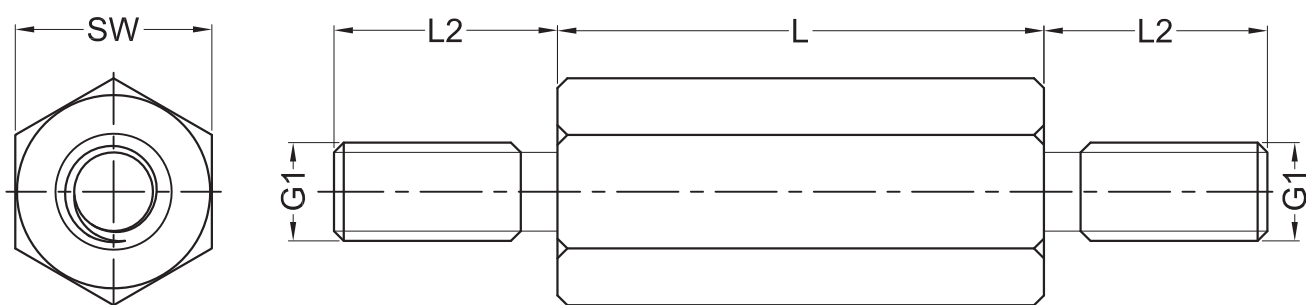

Part No.	SW (Hexagon)	G1 (Thread)	Standard L Length In (mm)																																		
			05	08	10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100												
442 x L (Length)	SW 5	M2.5	05	08	10	12	15	18	20	25	30	35	40	45	50																						
444x L	SW 5.5	M3	05	08	10	12	15	18	20	25	30	35	40	45	50	55	60	65	70																		
446x L	SW 7	M4		08	10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100												
448x L	SW 8	M5			10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100												
449x L	SW 10	M6			10	12	15	18	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100												
4413x L	SW 13	M8					15	20	25	30	35	40	45	50		60	70	80	90	100																	

Order Example	Additional Information 1	Additional Information 2
With undercut: 442 x L = 442 x 10 mm Without undercut: 442 x L = 442 x 10 mm (without undercut)	The option "without undercut" is without extra charge.	SW 13 applies for DIN 2768-m

Americom GmbH <a href="https://americom.de">https://americom.de</a>		<b>americom</b> Komponenten die verbinden		DATE	2012-4-28		
TITLE	HEX SPACER - MALE / MALE				SCALE	FIT	
PART NAME	/	MOLD NO.	/	DRAW	JF	UNIT	MM
PART NO.	SEE TABLE	MATERIAL	SEE TABLE	DESIGN	JF	VERSION	A0
DWG NO.	E0024	COLOR	/	APPROVAL	FDL	VIEW	