


Notes:

1. Material: PA66 UL94 V2;
2. Color: Natural;
3. Male (M2) Torques: ≥ 0.06 Nm;
Male (M2.5) Torques: ≥ 0.08 Nm;
Male (M3) Torques: ≥ 0.13 Nm;
Male (M4) Torques: ≥ 0.3 Nm;
Male (M5) Torques: ≥ 0.58 Nm;
Male (M6) Torques: ≥ 0.8 Nm;
4. RoHS Compliant.

REV	DESCRIPTION	DATE	CHECK
A1	The mark position of "L" changed	2016-4-13	FDL
A2	①1.35 Change to 1.65; ②2.0 Change to 2.7; ③2.5 Change to 2.7; ④3.0 Change to 3.3; ⑤Ø7.6 Change to Ø8.4;	2016-7-14	FDL

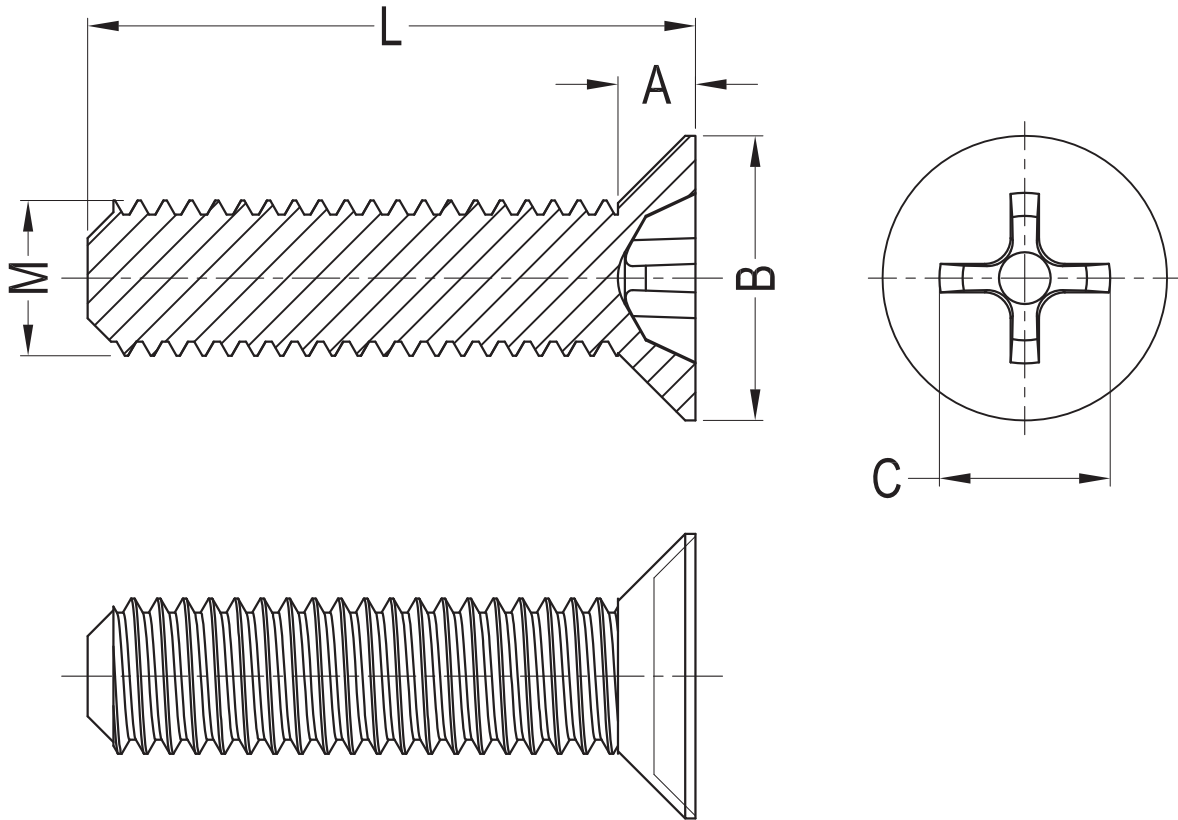

Part No. / Article No.	length	5.0	6.0	7.0	8.0	10.0	12.0	15.0	16.0	18.0	20.0	22.0	25.0	30.0	35.0	40.0	42.0	50.0	60.0	A	B	C
GCSHSC-7046-M2-L		50944	50945		50946	50947	50948		50949		50950		50951							1.2	Ø3.8	1.9
GCSHSC-7046-M2.5-L		50952	50953		50954	50955	50956		50957		50958		50959							1.5	Ø4.7	2.7
GCSHSC-7046-M3-L		50244	50245		50246	50247	50248		50249		50250		50251	50252			50253			1.65 ^①	Ø5.5	2.9
GCSHSC-7046-M4-L			50282		50283	50284	50285	50286	50287		50288		50289	50290	50291					2.7 ^②	Ø8.4 ^⑤	4.6
GCSHSC-7046-M5-L			50653	50322	50323	50324	50325	50326	50327	50328	50329		50330	50331	50332	50333				2.7 ^③	Ø9.0	4.8
GCSHSC-7046-M6-L					50366	50367	50368	50369	50370		50371	50372	50373	50374		50375		50376	50377	3.3 ^④	Ø11.0	6.6

Americom GmbH
https://americom.de

americom
Komponenten die verbinden

DATE	2022-1-6	DIMENSION	L ≤ 4	TOLERANCE	±0.10
SCALE	FIT				
UNIT	MM		4 < L ≤ 15		±0.20
VERSION	A2		15 < L ≤ 50		±0.30
VIEW			50 < L ≤ 100		±0.40

TITLE	CROSSED COUNTERSUNK SCREW				
ARTICLE NO.	GCSHSC-7046	MOLD NO.	/	DRAW	JF
PART NO.	SEE TABLE	MATERIAL	SEE NOTES	DESIGN	JF
DWG NO.	E5037	COLOR	SEE NOTES	APPROVAL	FDL